



Caños

ASTM A-312

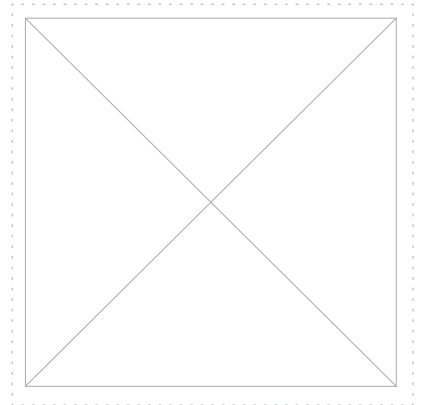

Corte Axial
Pieza Completa

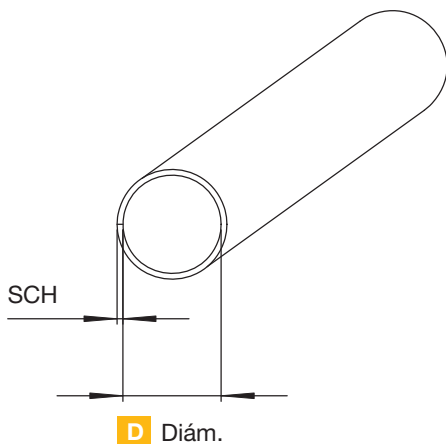

D NOM. pulg.	D NOM. mm.	SCH 5S		SCH 10S		SCH 40S		SCH 80S	
		ESPESOR EN MM.	PESO KG / MT.	ESPESOR EN MM.	PESO KG / MT.	ESPESOR EN MM.	PESO KG / MT.	ESPESOR EN MM.	PESO KG / MT.
1/8"	10.29	-	-	1.24	0.290	1.73	0.390	2.41	0.500
1/4"	13.72	-	-	1.65	0.510	2.24	0.670	3.02	0.840
3/8"	17.15	-	-	1.65	0.660	2.31	0.880	3.20	1.150
1/2"	21.34	1.65	0.836	2.11	1.045	2.77	1.326	3.70	1.690
3/4"	26.67	1.65	1.057	2.11	1.328	2.87	1.751	3.90	2.280
1"	33.40	1.65	1.336	2.77	2.166	3.38	2.591	4.55	3.350
1 1/4"	42.16	1.65	1.700	2.77	2.775	3.56	3.497	4.85	4.600
1 1/2"	48.26	1.65	1.953	2.77	3.200	3.68	4.167	5.08	5.570
2"	60.33	1.65	2.453	2.77	4.040	3.91	5.591	5.54	7.680
2 1/2"	73.03	2.11	3.786	3.05	5.340	5.16	8.864	7.01	11.700
3"	88.90	2.11	4.628	3.05	6.537	5.49	11.575	7.62	15.640
4"	114.30	2.11	5.975	3.05	8.452	6.02	16.400	8.56	22.830
5"	141.30	2.77	9.677	3.40	11.825	6.55	22.261	9.52	31.620
6"	168.30	2.77	11.556	3.40	14.130	7.11	28.885	10.97	43.480
8"	219.10	2.77	15.092	3.76	20.393	8.18	43.456	12.70	65.990
10"	273.05	3.40	23.083	4.19	28.363	9.27	61.567	12.70	83.200
12"	323.85	3.96	31.885	4.57	36.726	9.52	75.322	12.70	99.410
14"	355.60	3.96	35.045	4.78	42.200	-	-	-	-
16"	406.40	4.19	42.406	4.78	48.306	-	-	-	-
18"	457.20	4.19	47.755	4.78	54.410	-	-	-	-
20"	508.00	4.78	60.512	5.54	70.030	-	-	-	-
22"	558.80	4.78	66.615	5.54	77.100	-	-	-	-
24"	609.60	5.54	87.173	6.35	96.350	-	-	-	-

Calidad
del material

304 - 304L - 316 - 316L

Otra
Descripción

ANSI B 36.19

Descripción Técnica

Soldadura longitudinal, proceso automático por fusión de material sin aporte de material, dimensión según ANSI B 36,19

